

gemini rx



*the low-cost light with high-end features...*

With Bowens entry-level lighting there is no compromise on quality or features.

The ultra-compact Gemini 200Rx and 400Rx models feature the same solid, dependable, tough metal construction build of other Gemini units. The smaller size of these tough units combined with built-in Pulsar radio trigger receivers make them perfect for location or event photography.

Performance has not been compromised either with both models offering impressive

flash-durations and recycle times & control over 5 stops of power using a single simple yet accurate dial which also controls the proportional modelling lamp – simply press a switch for modelling at 100% or off. No complicated digital menu systems – ‘simplicity’ is key, the Gemini really is plug-and-go.

And when you want to go, Gemini is the only truly portable studio flash system, power from mains power or the Travelpak battery delivering up to 750 flashes per charge.

#### Gemini Rx - Key Features

- Built-in Pulsar radio receiver.
- Simple to use intuitive controls.
- Five stops of power control.
- Lightweight & compact.
- Travelpak Battery compatible.
- Improved ergonomic design.
- Auto Power-save mode.
- Robust Metal Construction.
- Proportional modelling control.
- Recessed switches & sockets.
- Fast Flash-Durations.
- DSLR friendly Low Sync Voltage.



\* Also available as BW3660 Gemini 200 & BW3670 Gemini 400 without built-in radio trigger.

## gemini rx specifications



Specifications	Gemini 200Rx	Gemini 400Rx
Max Power	200Ws	400Ws
Guide Number	60	76
Power Range	5 stops (6Ws - 200Ws)	5 stops (12Ws - 400Ws)
Recycle Time (Full)	0.7 secs	1.2 secs
Flash Duration (t0.5)	1/1450	1/1000
Sync Voltage	5V	5V
Colour Temperature	5600K ±300	5600K ±300
Ready Light	Yes	Yes
Auto Dump	Yes	Yes
Lamp Saver	Yes	Yes
Slave Cell	Yes	Yes
Modelling Lamp (230V)	BW1024 (BW1024/B 117V)	BW1024 (BW1024/B 117V)
Flash Tube	BW2030 (Clr) BW2032 (UV)	BW2030 (Clr) BW2032 (UV)
Battery Compatible	Yes	Yes
Width	150mm [5 <sup>7</sup> / <sub>16</sub> "	150mm [5 <sup>7</sup> / <sub>16</sub> "
Length	320mm [12 <sup>5</sup> / <sub>16</sub> "	320mm [12 <sup>5</sup> / <sub>16</sub> "
Height	150mm [5 <sup>7</sup> / <sub>16</sub> "	150mm [5 <sup>7</sup> / <sub>16</sub> "
Weight	2.5kg [5.5lbs]	2.7kg [5.9lbs]
<b>230V Part No.:</b>	<b>BW3970UK</b>	<b>BW3980UK</b>
<b>117V Part No.:</b>	<b>BW3975US</b>	<b>BW3985US</b>

#### The Controls

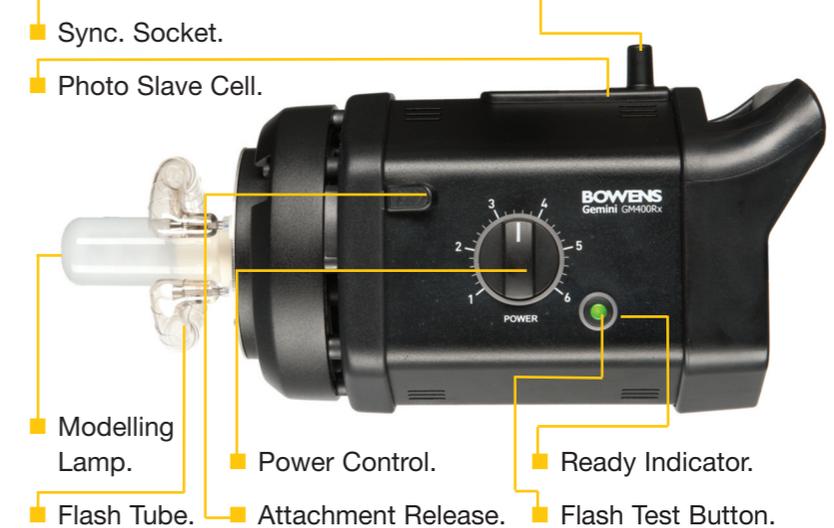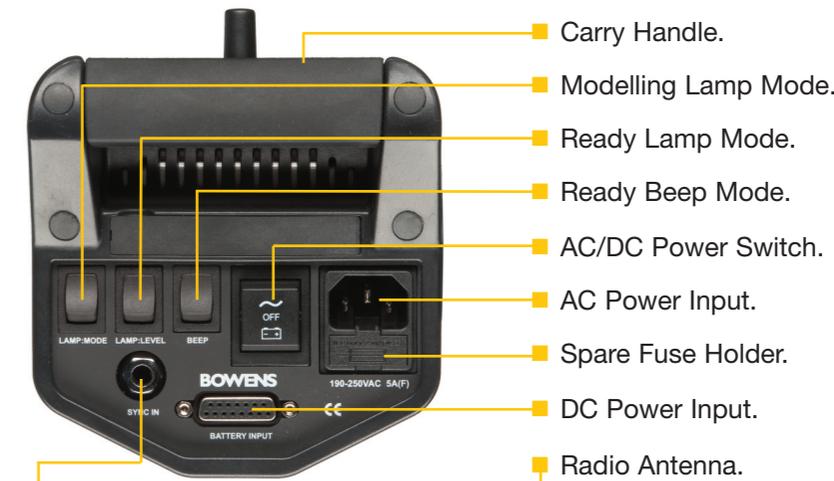

- Carry Handle.
- Modelling Lamp Mode.
- Ready Lamp Mode.
- Ready Beep Mode.
- AC/DC Power Switch.
- AC Power Input.
- Spare Fuse Holder.
- DC Power Input.
- Radio Antenna.
- Sync. Socket.
- Photo Slave Cell.
- Modelling Lamp.
- Flash Tube.
- Power Control.
- Attachment Release.
- Ready Indicator.
- Flash Test Button.